


A—A
5: 1

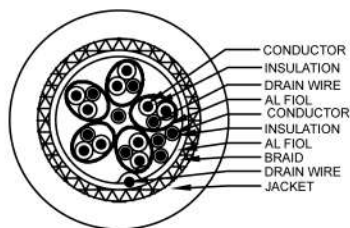


NOTE:

1.Electrical test:

- (1).100% open short & miss wire test;
- (2).Insulation resistance: DC 300V/5s 10MΩ min;
- (3).Contactor resistance: 3Ω max;
- (4).Support 4K*2K/60Hz.

2.RoHS 2.0 compliant, REACH compliant.


PIN OUT

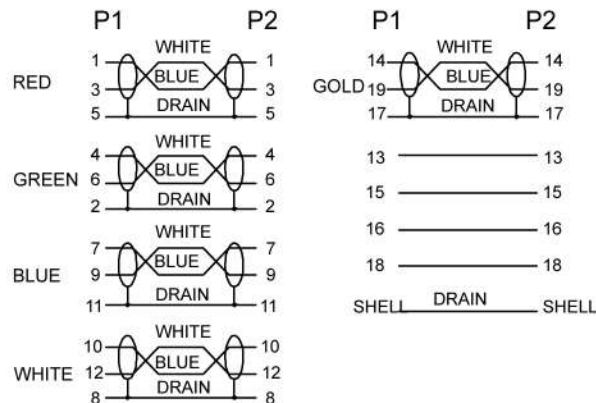

MODEL LIST

Model	Length
ICOC HDMI2-4-005T	500±20mm
ICOC HDMI2-4-010T	1000±20mm
ICOC HDMI2-4-020T	2000±30mm
ICOC HDMI2-4-030T	3000±30mm
ICOC HDMI2-4-050T	5000±50mm

PACKING DRAW

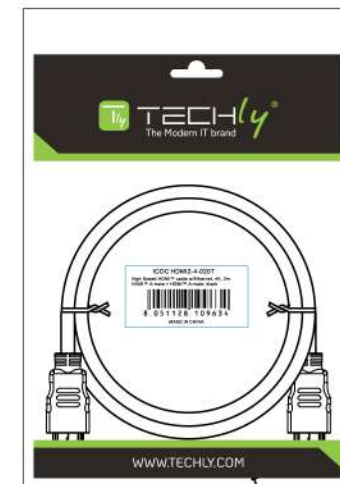

MATERIAL LIST

⑦	PACKAGE	GREEN TECHLY ZIP BAG+1 STICKER	1
⑥	PRINTING	HIGH SPEED HDMI CABLE WITH ETHERNET	
⑤	CABLE	(7/0.10TC*1P+7/0.10TC+AL)*5PCS+7/0.10TC*4C+AL+7/0.10TC+80/0.12ALMG+PVC, OD: 6.0±0.2MM, COLOR: BLACK	L
④	MOLD HOOD	PVC, COLOR: BLACK	1
③	MOLD HOOD	PVC, COLOR: BLACK	1
②	CONNECTOR	HDMI 19PIN A MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1
①	CONNECTOR	HDMI 19PIN A MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1
No.	PART NAME	DESCRIPTION	QTY

DRAW No.		NAME	HDMI 2.0 CABLE, 30AWG
CUSTOMER	IC INTRACOM		MAPE
MODEL No.			TOLERANCE
			X. ±1.00
			X.X ±0.50
APPROVE BY	CHECK BY	DRAW BY	SCALE
			MM
			PAGE
			1/1