


135 dB SAT KABEL

5-fold shielded

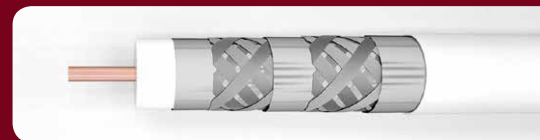

**HIGH QUALITY
COAX CABLE**

CABLE CONSTRUCTION

Inner conductor	1,02 mm C.U.
Isolation	4,6 mm FPE
1. Foil shielding	ALU foil
1. Braid shielding	ALU braid
2. Foil shielding	ALU foil
2. Braid shielding	ALU braid
3. Foil shielding	ALU foil
Outer jacket	7,0 mm PVC +/-0,2

Attenuation (20°C)

100 MHz	5,75 dB
200 MHz	7,06 dB
300 MHz	8,62 dB
500 MHz	12,05 dB
800 MHz	14,53 dB
1000 MHz	18,48 dB
1350 MHz	21,93 dB
1750 MHz	25,78 dB
2050 MHz	27,40 dB

TECHNICAL SPECIFICATIONS

Impedance(Q)	75 +/-3
Capacity [pF/m]	55
Shortening factor [v/c]	0,85



Packing units:

Item No.	Length	Packing unit (PU)	On a pallet
1954-C	25m	16 plastic spools each	480 PU
1955-C	50m	18 plastic spools each	240 PU
1951-C	100m	14 pieces spool cardboard each	144 PU
1951-5-C	500m	11 pieces spool of wood	30 PU

