



Quick Installation Guide


Indoor Wireless HD IP Camera



Model: SABIP1600

V1.0

Package Contents



IP Camera




AC Adapter



Quick Installation Guide




USB Power Cable



Resource CD


1 Hardware Introduction

Physical Description

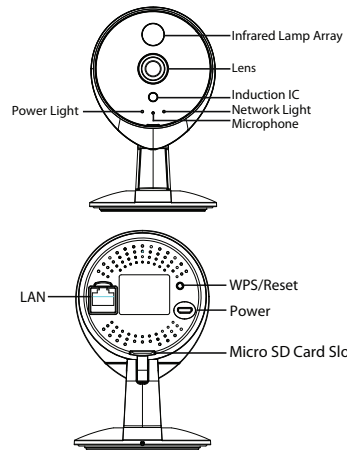


Hardware Installation

1. Rotate the base of the camera until points a and bare aligned, this allows for the mounting plate to be removed.
2. Install the mounting plate on a wall or ceiling with supplied fixing screws.
3. Align points a and b to insert the camera base to the mounting plate. Rotate so that points a and b are no longer aligned, this attaches the camera securely to the base.

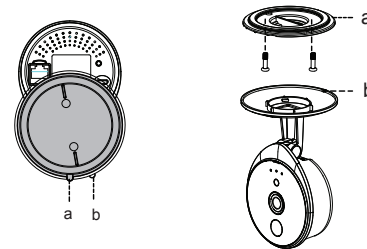

Hardware Connection

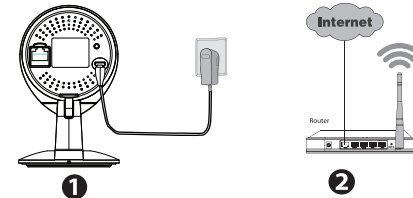

1. After connect the AC power adapter to the camera, the camera is in EZLink mode by default.
2. Turn on your wireless router.

Before you continue, please note:

- Make sure your smart phone is located near the camera.
- Do not use an ethernet cable to connect the camera if you want to use a wireless connection.
- Make sure smart phone is connected to your wireless router.

■ Network Light Status

Network Light	Description
Constant Flash	Wired connection
Flashing every 0.2 seconds	EZLink takes effect (default)
Flashing every 0.4 seconds	WPS is connecting
Slow Flash every 1.0 second	Wi-Fi connected

2 Add the IP Camera

You can add the IP Camera by smart phone.

1. Download the App

You can go to the App Store or Google Play store and search for “**SAB IPC Viewer**”. Please download and install it.

The App icon will be displayed after successful installation:



SAB IPC Viewer

2. Add the IP Camera

Run the app, then you can tap the "+" button on the app and follow the setup wizard to add your camera.

3 Access the IP Camera

After your camera has been successfully added, you can access the IP Camera via the app or browser.

If you want to use your camera via the browser, you can search and access its local website in LAN.


1. Please copy the “IP Camera Search Tool” file from the CD to your computer.



Please Note:

Make sure the camera and PC are both in the same Local Area Network (LAN).

2. Open "IP Camera Search Tool".



3. Double click the camera list here, and your default browser will open up to the login page.
4. When logging in for the first time, you will need to download and install the add-on.
5. After logging in, you can manage camera through the browser.

4 FAQ

Forget Username / Password

Restore camera back to factory settings:

1. Press "Reset" button for about 10 seconds with camera powered on.
2. Release the button and wait about 30 seconds, the camera will automatically restart, and restore factory settings with its username / password recovery to admin / (blank).

Please Note:

- After restore to factory default settings, you need to config the Wi-Fi connection again, you can follow the Setup Wizard of the App to add again.
- In case your device failed to add by Wi-Fi, you can use WPS connection. please refer to the User Manual on the CD.

